
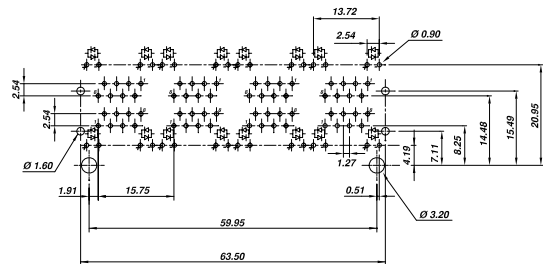




RoHS Compliant

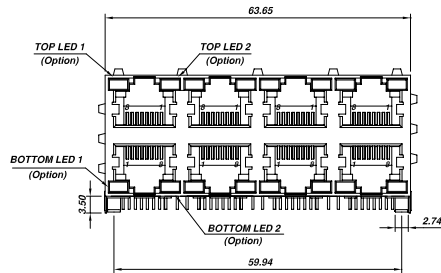

PC Layout
(Top View)

LED Designation :					
Code	Forward	Reverse	Code	Forward	Reverse
G	Green	---	4	Yellow	Red
Y	Yellow	---	5	Green	Yellow
R	Red	---	6	Yellow	Green
O	Orange	---	9	Red	Green
3	Green	Red	0	Red	Yellow


SPECIFICATION :

1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min. 500V DC. for 1 minute.
- Contact Resistance : 30milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 150V AC.
- Dielectric Voltage : 1,000 Vrms at 1MA 60 Sec. Min.

2. Physical char.

- Housing (Option) : For Waving Soldering Process
- PBT Glass Filled (UL 94V-0), Soldering Temperature: 245°C for 5 Sec.
- Nylon (UL 94V-0), Soldering Temperature: 260°C for 5 Sec.
- Color : Black Color
- Spring Wire : 0.35mm Thickness Phosphor bronze Gold Plating Over Nickel
- Shielded : Brass Plating Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 750 Mating cycles Min.

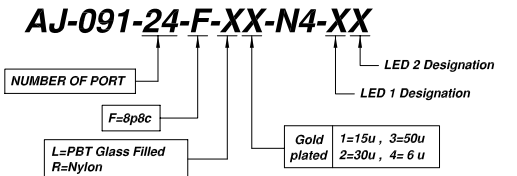

ALLSUN CORPORATION
 9FL,NO.292 SEC.7 CHENG TEH ROAD.TAIPEI TAIWAN.
 E - mail Address : allsun@globalsources.com

TITLE **RJ45 2X4 8 POSITIONS**
DOUBLE DECK GANG SHIELDED JACK WITW LED
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
AJ-091-24-F-XX-N4-XX

SCALE SIZE DWG. NO. 9791S SERIES

DWG. NO.

AST091A06-1

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR	$.00 \pm 0.01$	$.00 \pm 0.25$	Steven	MAY-31 '13
		$.0000 \pm 0.005$	$.0000 \pm 0.13$	CK'D	
		$.0000 \pm 0.002$	$.0000 \pm 0.05$	John	MAY-31 '13
	ANGLE +0° 30'	RADII	+0.45 -0.15	APP'D Billy	MAY-31 '13